




# Bunting Bearings, LLC

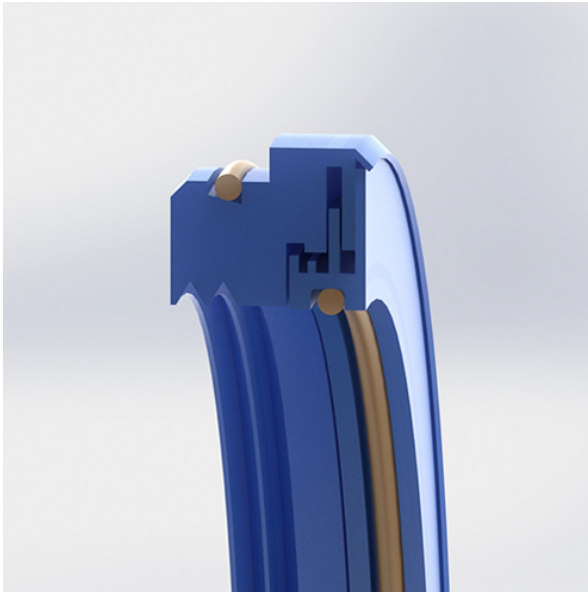

## Garlock 29502-4192 Bearing Isolators

Bearing No. 29502-4192

29502-4192 Bearing 2D drawings and 3D CAD models

|                               |  |
|-------------------------------|--|
| shaft diameter:               | 2.7561 in  |
| typical application:          | Exceptional Bearing Protection, Rotating Applications, Pumps, Gearboxes, Motors, Energy Efficient Applications, Primary Metals Industry, Steel Industry, Aluminum Industry, Pulp and Paper Industry, Che |
| lip material:                 | Labyrinth  |
| harmonization code:           | 3926904590.US  |
| construction description:     | ISO-GARD® Flanged Design, Filled PTFE Rotor and Stator, FKM O-Rings, and 0.375" Flange ISO-GARD® Flanged Design Filled PTFE Rotor and Stator FKM O-Rings and 0.375"                                      |
| manufacturer catalog number:  | 29502-4192   |
| continuous temperature range: | -22 to 400 ° F   |
| Weight                        | 0.315 lb   |
| maximum shaft surface speed:  | 4500 fpm   |
| D                             | 3.7400 in  |
| misalignment tolerance:       | 0.020 in   |
| width:                        | 0.7500 in  |
| pressure tolerance:           | Ambient  |