




Bunting Bearings, LLC

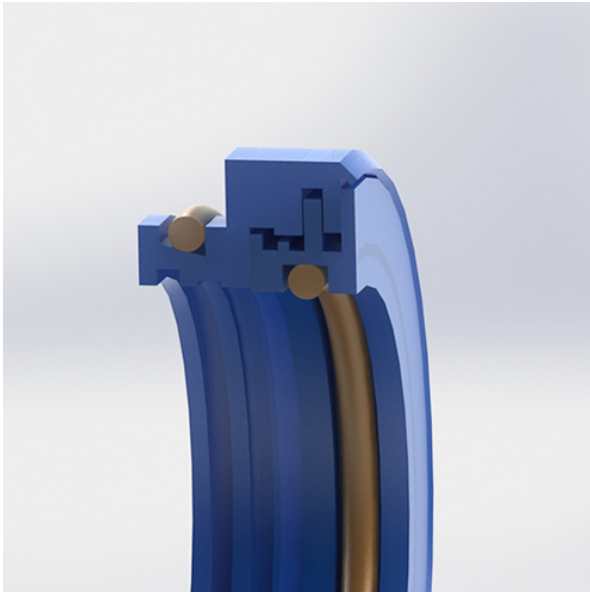

29507-5401 Bearing 2D drawings and 3D CAD models

Garlock 29507-5401 Bearing Isolators

Bearing No. 29507-5401

shaft diameter:	1.7500 in
typical application:	Exceptional Bearing Protection, Rotating Applications, Pumps, Gearboxes, Motors, Energy Efficient Applications, Primary Metals Industry, Steel Industry, Aluminum Industry, Pulp and Paper Industry, Che
lip material:	Labyrinth
harmonization code:	3926904590.US
construction description:	ISO-GARD® Small Cross-Section Design, Filled PTFE Rotor and Stator, FKM O-Rings, and 0.375" Flange ISO-GARD® Small Cross-Section Design Filled PTFE Rotor and Stator FK
manufacturer catalog number:	29507-5401
continuous temperature range:	-22 to 400 ° F
Weight	0.174 lb
maximum shaft surface speed:	4500 fpm
D	2.4370 in
misalignment tolerance:	0.020 in
width:	0.6250 in
pressure tolerance:	Ambient